


NEEDS APPROVAL
FROM LOCAL FIRE AUTHORITY

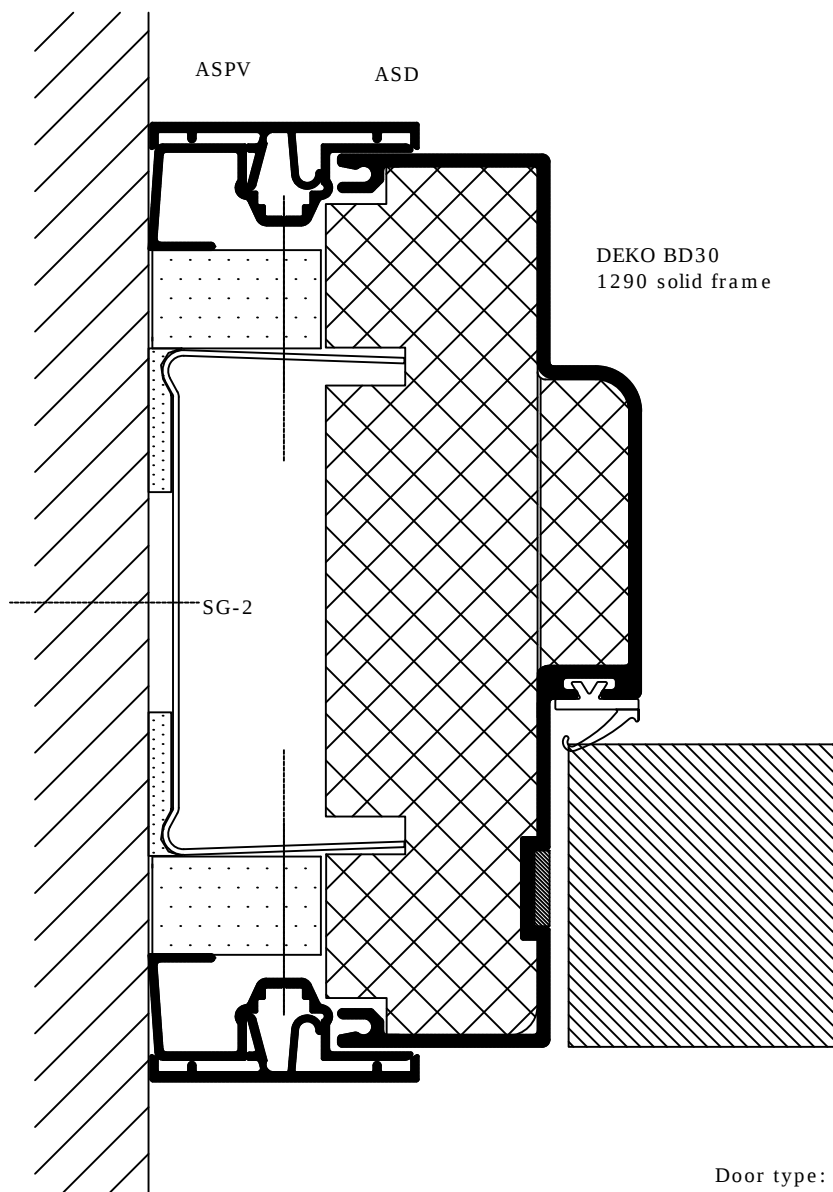

Door type:
DEKO TD - Solid wooden door 30dB - BD30
DEKO TG - wooden framed glass door 30dB - BD30

NOTE:
Glass thickness varies depending on dimensions, fire and sound requirements.
Possible fire resistance classes depend on the glass connection type - see detail V1 and V3.

FOR PRESENTATION PURPOSE ONLY
DO NOT USE FOR INSTALLATION

	DEKO Tel: +45 43 55 77 11 www.deko.com		Project: DEKO FG Fire - Details	
	Case No.:		Date:	Sheet No. 1/1
Scale: 1:1	Subject: Door to wall connection Detail V6A		Revision: 2021-02-11-V01	Signature TCE