


NEEDS APPROVAL
 FROM LOCAL FIRE AUTHORITY

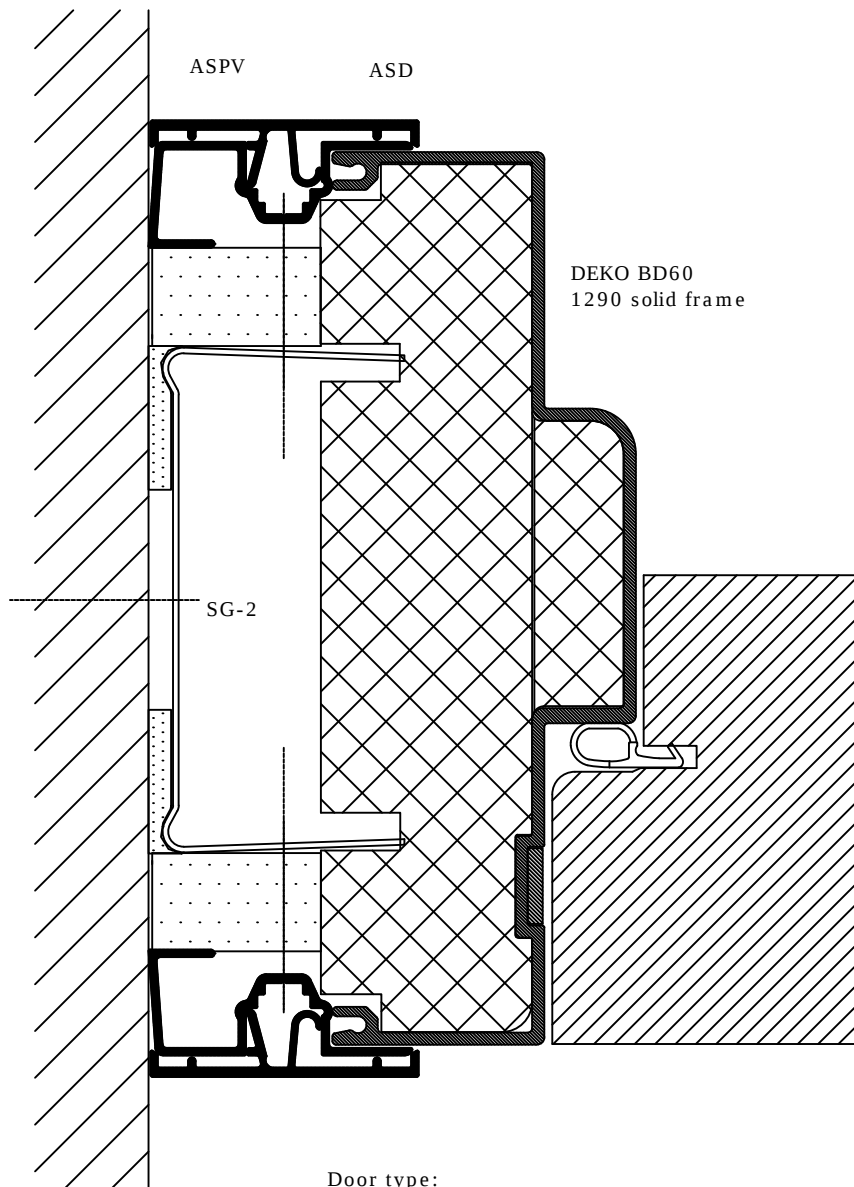

Door type:
 DEKO TD - Solid wooden door 35db - BD60
 DEKO TG - wooden framed glass door 35db - BD60

NOTE:
 Glass thickness varies depending on dimensions, fire and sound requirements.
 Possible fire resistance classes depend on the glass connection type - see detail V1 and V3.

FOR PRESENTATION PURPOSE ONLY
 DO NOT USE FOR INSTALLATION



DEKO
 Tel: +45 43 55 77 11
 www.deko.com

Project:
 DEKO FG Fire - Details

Case No.:

Subject:
 Door to wall connection
 Detail V6C

Date:

Sheet No. 1/1

Scale:
 1:1

Revision:
 2021-02-11-V01

Signature TCE