



NEEDS APPROVAL
 FROM LOCAL FIRE AUTHORITY

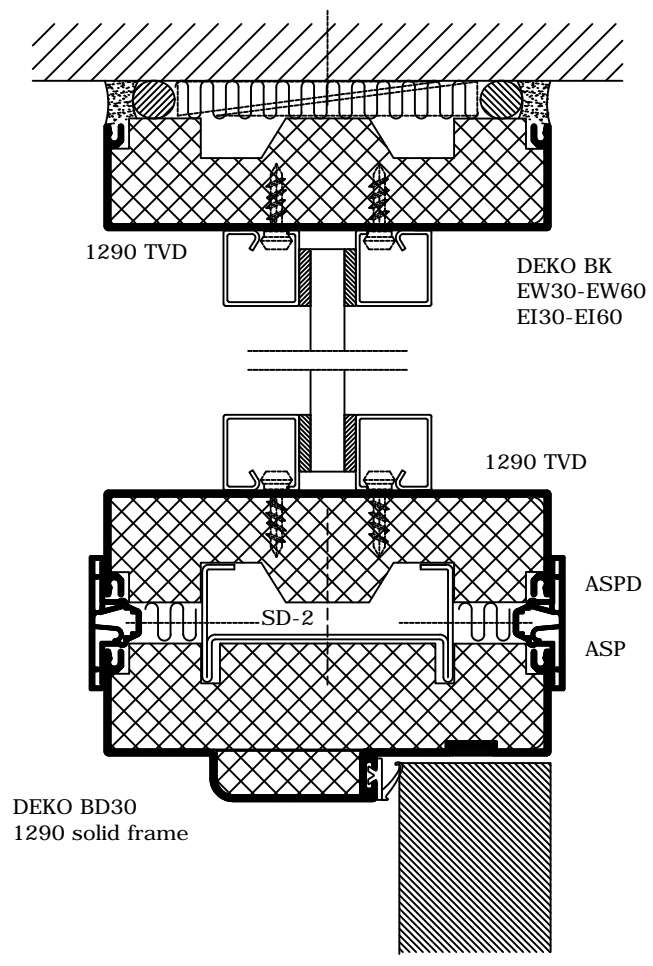

Door type:
 DEKO TD - Solid wooden door 30dB - BD30
 DEKO TG - wooden framed glass door 30dB - BD30

NOTE:
 Glass thickness varies depending on dimensions, fire and sound requirements.
 Possible fire resistance classes depend on the glass connection type - see detail V1 and V3.

FOR PRESENTATION PURPOSE ONLY
 DO NOT USE FOR INSTALLATION

	DEKO Tel: +45 43 55 77 11 www.deko.com	Project: DEKO FG Fire - Details	
	Case No.:	Subject: Door connection of DEKO TD and TG doors Detail L4A	Date:
Scale: 1:2		Revision: 2021-02-11-V01	Signature TCE