


NEEDS APPROVAL
 FROM LOCAL FIRE AUTHORITY

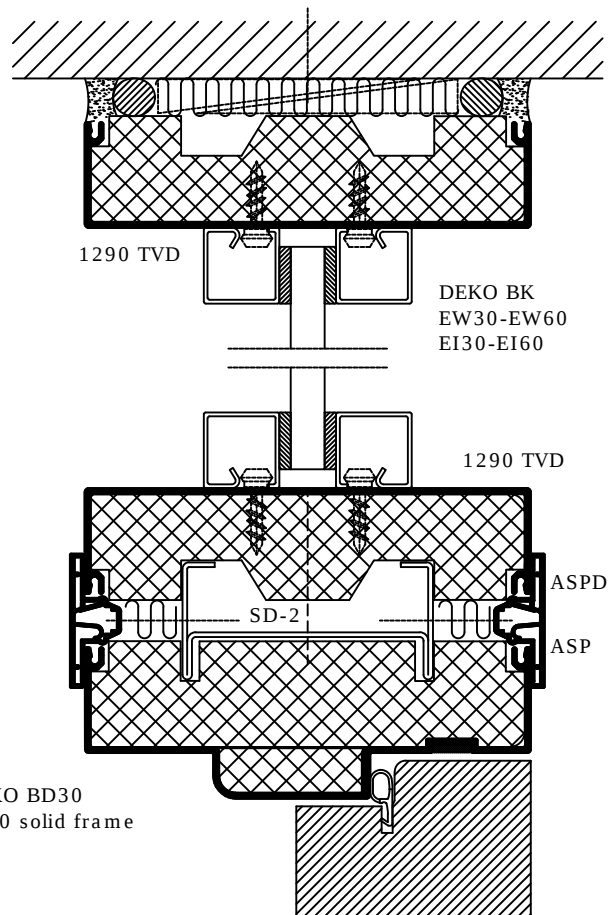

Door type:
 DEKO TD - Solid wooden door 35dB - BD30
 DEKO TG - wooden framed glass door 35 dB - BD30

NOTE:
 Glass thickness varies depending on dimensions, fire and sound requirements.
 Possible fire resistance classes depend on the glass connection type - see detail V1 and V3.

FOR PRESENTATION PURPOSE ONLY
 DO NOT USE FOR INSTALLATION



DEKO
 Tel: +45 43 55 77 11
 www.deko.com

Project:
 DEKO FG Fire - Details

Case No.:

Subject:
 Door connection of DEKO TD and TG doors
 Detail L4B

Date:

Sheet No. 1/1

Scale:
 1:2

Revision:
 2021-02-11-V01

Signature TCE