


NEEDS APPROVAL
FROM LOCAL FIRE AUTHORITY

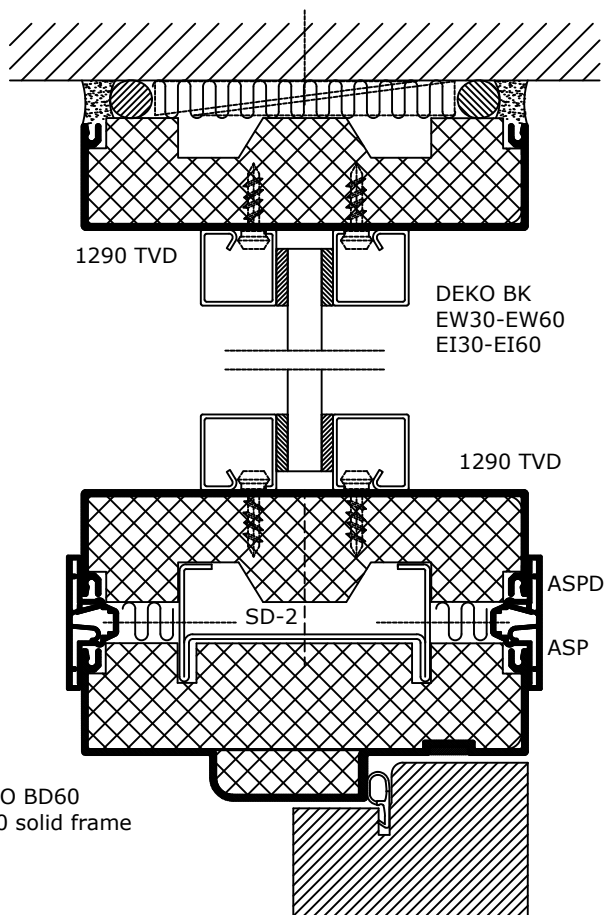

Door type:
DEKO TD - Solid wooden door 35dB - BD60
DEKO TG - wooden framed glass door 35dB - BD60

NOTE:
Glass thickness varies depending on dimensions, fire and sound requirements.
Possible fire resistance classes depend on the glass connection type - see detail V1 and V3.

FOR PRESENTATION PURPOSE ONLY
DO NOT USE FOR INSTALLATION



DEKO

Tel: +45 43 55 77 11
www.deko.com

Project:

DEKO FG Fire - Details

Case No.:

Subject:

Door connection of DEKO TD and TG doors
Detail L4C

Date:

Sheet No.

1/1

Scale:
1:2

Revision:

2021-02-11-V01

Signature

TCE